

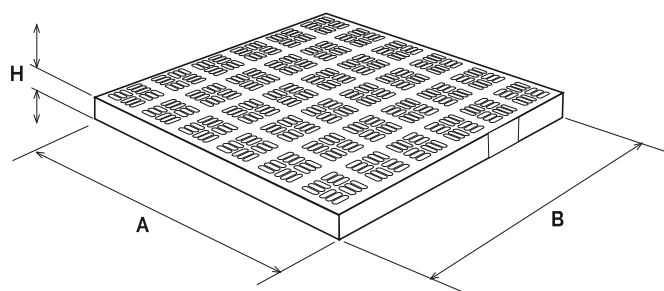


PVC
ANTI-SHOCK




D I M E N S I O N I

	A	B	H	CARICO DI ROTTURA
SCD20	187	187	20	25 kN
SCD25/SCDB25	234	234	20	58 kN
SCD30	284	284	22	66 kN
SCDB30	284	284	22	66 kN
SCD40/SCDB40	383	383	25	B125
SCD45	435	435	25	> 90 kN
SCD55	534	534	35	60 kN

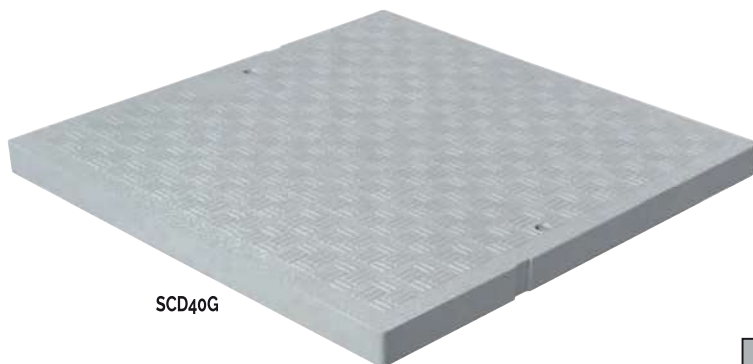


ARTICOLO	CODICE	DIMENSIONI mm.	COLORE	
	SCD20G	200x200		10
	SCD25G	250x250		10
	SCD30G	300x300		5
	SCD40G*	400x400	Grigio	2
	SCD45G	450x450		2
	SCD55G	550x550		2

Coperchio CARRABILE in PVC



ARTICOLO	CODICE	DIMENSIONI mm.	COLORE	
	SCDB25G	250x250		10
	SCDB30G	300x300	Grigio	5
	SCDB40G*	400x400		2

Coperchio CARRABILE in PVC con bloccaggio



ARTICOLO	CODICE	DIMENSIONI mm.	COLORE	
	GUD30	300x300		10
	GUD40	400x400	Nero	4

Guarnizione per bloccaggio

* Il coperchio SCD40G/SCDB40G soddisfa i requisiti richiesti secondo la norma UNI EN 124 Classe B125